

The FLP Bulkhead is a highly efficient and reliable LED bay light luminaire, designed as a point-to-point replacement for HID technology in chemical factories and warehouses. Featuring a single-piece die-cast aluminum housing with an integrated heat sink and inbuilt potted driver, it ensures excellent thermal management. This luminaire reduces energy consumption, meets the highest performance standards, delivers outstanding light quality, maintains uniformity, and enhances safety and visual comfort.



**FEATURES & BENEFITS**

- Higher system efficiency up to 130 lumens/Watt
- Reduces energy consumption by up to 60% versus conventional HID light.
- Maintain "Zero Air Gap" between MCPCB and extruded aluminium modules ensures fastest heat dissipation.
- LM-80 compliant high efficiency & Photo biologically safe LEDs
- High performance electronic driver with 440V protection for 8 Hrs. (Phase to Phase).
- High Voltage Cut off @ 310 ± 15V with Auto Restart feature.
- Along with the additional 10kV/5kA built-in surge protection device.
- High quality of light by increase CRI up to 80 for all colour temperature.
- Vibration, dust and heat resistant.
- No harmful UV & IR radiation
- Lifetime of over 50, 00 hours at L70, which requires no lamp replacement after installation
- Complies with IP 65 ingress protection rating ensuring stable and consistent performance over product life time.

**PRODUCT SPECIFICATIONS**

**Housing & Glass Frame :**

Epoxy powder coated finished Cast aluminium housing (heat sink) for effective thermal management, sturdiness & excellent corrosion resistance.

**Glass Frame :**

Tempered protective toughened glass sealed with glass frame and fixed to the housing with SS Allen bolts. Neoprene gasket is used for maintaining ingress protection.

**Light source :**

High efficiency long life LED module with EMC package SMD type LED mounted on MCPCB. Lumen efficacy of LED ≥160 lm/W with beam angle 120° for uniform distribution.

**Electronic Driver :**

Built in potted constant current multistage isolated LED driver with < 10% THD, PF ≥0.98, Output Open /Short Circuit protection, Over Voltage protection, Surge Voltage protection & other safety tests as per IS 15885 Part-2/Sec 13 and BIS comply.

**Mounting & Maintenance :**

Surface mounting using fixed MS bracket of thickness 3.0 mm provided with the fixture by 2 circular slots of 12mm Ø at center distance of 265mm. Recommended mounting height with suitable in ground reinforcement is 4-5 m.

**APPLICATIONS :**

- Oil Rings & Refineries
- Mines
- Chemical Factories
- Petrochemical Industries


**Note:** Bulk Head Luminaires are provided with additional 10kV Built in surge protection device (SPD).

**TECHNICAL DATA**

Product Code	Ordering Code	LED Wattage	System Wattage (W)	Rated Voltage (V)	Mains Current (A)	Lumens
PLFB 538 / 30	PLFB 538 / 42 / 30	26	30	230	0.14	3900
PLFB 538 / 45	PLFB 538 / 42 / 150	39	45	230	0.21	5500

**Note:** Warranty Voids for LED fixtures including Drivers, if individual points of installations are not provided with proper Earthing

**TECHNICAL DRAWING**

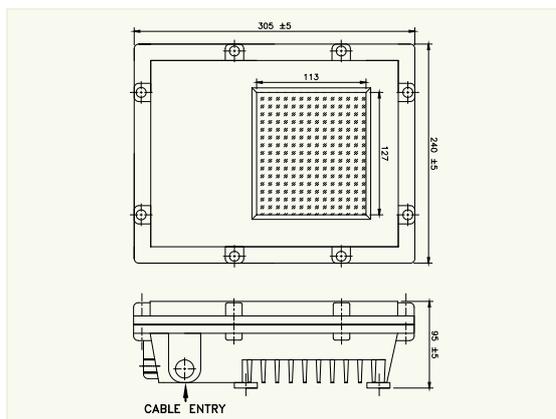

**DIMENSION**

Product Code	Dimension in mm			Approx Weight
	L	W	H	
PLFB 538 / 45	305	240	95	4.550